

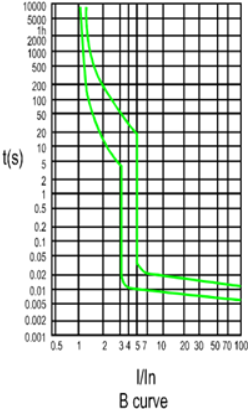

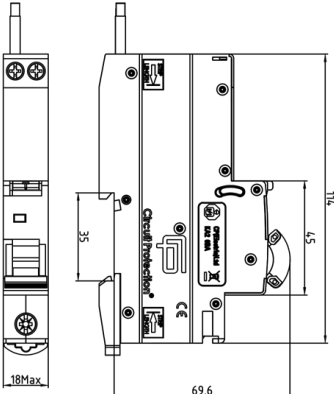





<h1>FuseBox®</h1>		BARCODE  5 060523 520398	
		RCBO RT064030B 	
TECHNICAL		TRIPPING CHARACTERISTICS	
Specification	RCBO		
Standard	BS EN 61009-1		
Number of Poles	1P + N		
Tripping Characteristics	B curve= 3-5In C curve= 5-10In		
Tripping Type	Electronic		
Rated Breaking Capacity (Icu)	6kA		
Rated Current (In)	6 - 50A		
Rated Voltage (Un/AC)	230V		
Residual Current Characteristics	AC		
Rated Residual Operating Current (IΔn)	0.03		
Frequency (Hz)	50/60		
Mechanical Endurance	20,000		
Protection Degree	IP20		
Terminal Size (mm ²)	1 - 16 (L IN) 1 - 10 (Load: Nout Lout)		
Tightening Torque (Nm)	2.5 (L IN) 1.2 (Load: Nout Lout)		
Operating Temperature °C	-25~ +40°C		
Storage Temperature °C	-25~ +70°C		
RCBO 		DIMENSIONS 	
PRODUCT DATA			
PART NUMBER	RT064030B		
BARCODE	5060523520398		
DESCRIPTION	40A 30mA B TYPE 6kA RCBO		
VOLTAGE	230V 50/60Hz		
MAXIMUM LOAD	40A		
TERMINAL CAPACITY	1-16mm ² L in, 1-10mm ² Lout/Nout		
IP RATING	20		
STANDARD	BS EN 61009-1		
WEIGHT (1PC) Kg	0.2		
INNER CARTON QUANTITY	1		
OUTER CARTON QUANTITY	60		
ORIGIN OF MANUFACTURE	CHINA		
		CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk	
		Company Number 553729 VAT Number 258 7444 66	