

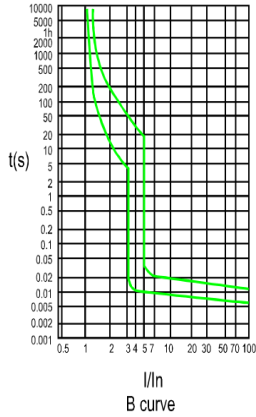

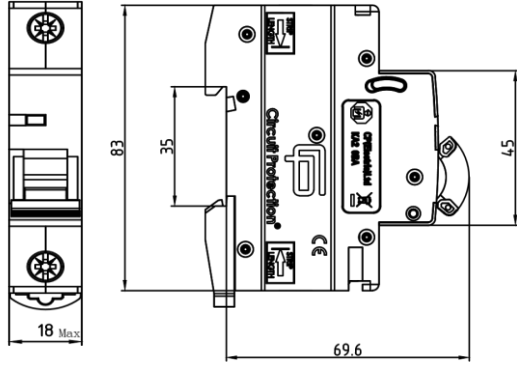



		BARCODE  5 060523 520206	
		Miniature Circuit Breaker (6kA) MT06B061 	
TECHNICAL		TRIPPING CHARACTERISTICS	
Specification	MCB		
Standard	BS EN 60898-1		
Number of Poles	1		
Tripping Characteristics	B curve= 3-5In C curve= 5-10In		
Tripping Type	Thermal Magnetic		
Rated Breaking Capacity (Icu)	6kA		
Rated Current (In)	1 - 63A		
Rated Voltage (Un/AC)	230V		
Residual Current Characteristics			
Rated Residual Operating Current (IΔn)			
Frequency (Hz)	50/60		
Mechanical Endurance	20,000		
Protection Degree	IP20		
Terminal Size (mm²)	1 - 16		
Tightening Torque (Nm)	2.5		
Operating Temperature °C	-25~ +40°C		
Storage Temperature °C	-25~ +70°C		
		DIMENSIONS 	
PRODUCT DATA			
PART NUMBER	MT06B061		
BARCODE	5060523520206		
DESCRIPTION	06A B TYPE MCB 6kA 1P		
VOLTAGE	230V 50/60Hz		
MAXIMUM LOAD	6A		
TERMINAL CAPACITY	16mm ²		
STANDARD	BS EN 60898-1		
MATERIAL	PA6 (Nylon 6)		
WEIGHT (1PC) Kg	0.12		
INNER CARTON QUANTITY	12		
OUTER CARTON QUANTITY	120		
ORIGIN OF MANUFACTURE	CHINA		
		CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk	
		Company Number 553729 VAT Number 258 7444 66	